



 EPHA Magnum

Modular design

The integrated elevator can fit all types of ovens in height and in width

Hygiene

The high position of the system makes it easier to clean the floor and the oven.

The integrated elevator is designed to minimize flour retention

Easy to use

The handling loads are compensated by adjustable counterweight.

The overhead storage position makes it easier to move about and creates extra space.

The elevator is fitted with industrial belts and therefore exceptionally quiet



Options

Color selection available to match the oven



Z.A Beausoleil – 8 Rue Gutemberg
44116 Vieillevigne
+33 (0)2 40 26 58 85
adv@aria-constructeur.fr


CONSTRUCTEUR

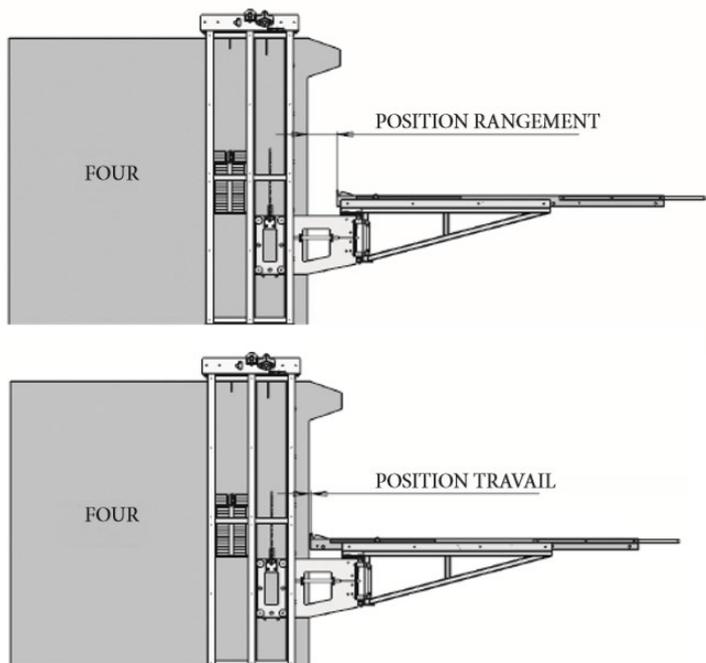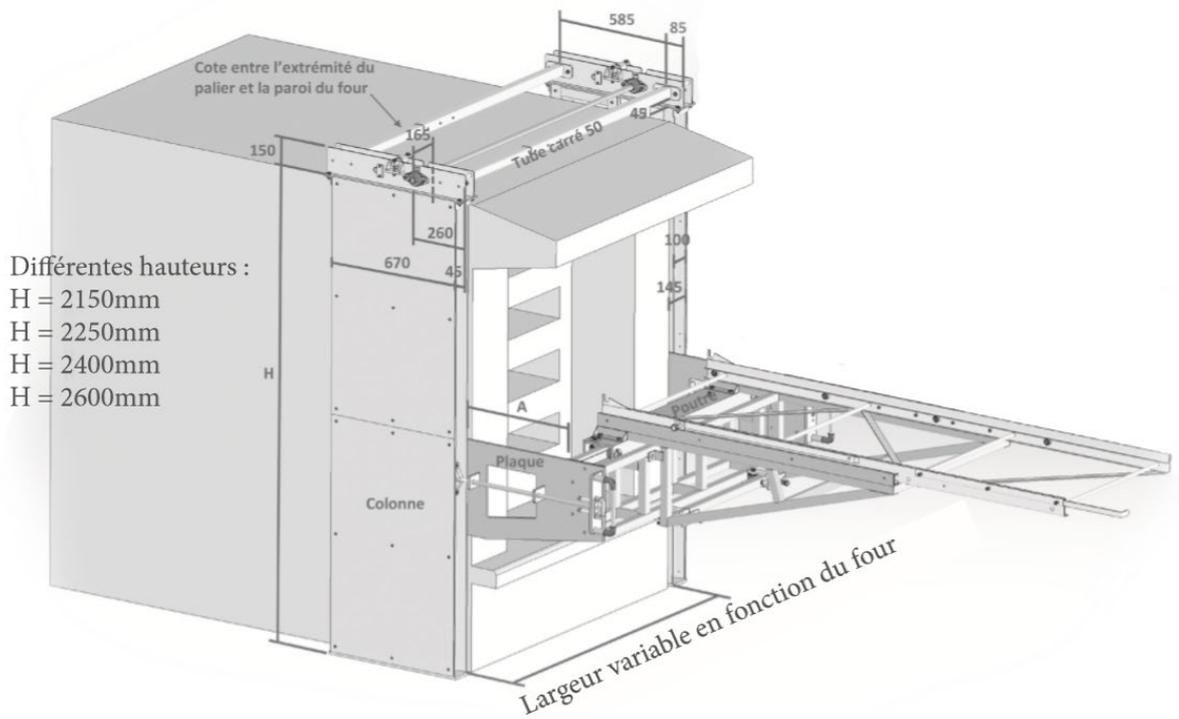

Characteristics

- Ergonomic release knob
- Adjustable index spacing of the deck
- Industrial timing belt transmission
- Minimum deck height: 500 mm
- Maximum loading length: 3 300 mm
- Maximum loading width: 880 mm
- Allows to load all bread and to unload most of the bread
- All parts in contact with the exhaust steam are made of aluminum



Modular design

The integrated elevator can fit all types of ovens in height and in width

Hygiene

The high position of the system makes it easier to clean the floor and the oven.

The integrated elevator is designed to minimize flour retention

Easy to use

The handling loads are compensated by adjustable counterweight.

The overhead storage position makes it easier to move about and creates extra space.

The elevator is fitted with industrial belts and therefore exceptionally quiet


Options

Color selection available to match the oven





Z.A Beausoleil – 8 Rue Gutenberg
44116 Vieillevigne
+33 (0)2 40 26 58 85
adv@aria-constructeur.fr



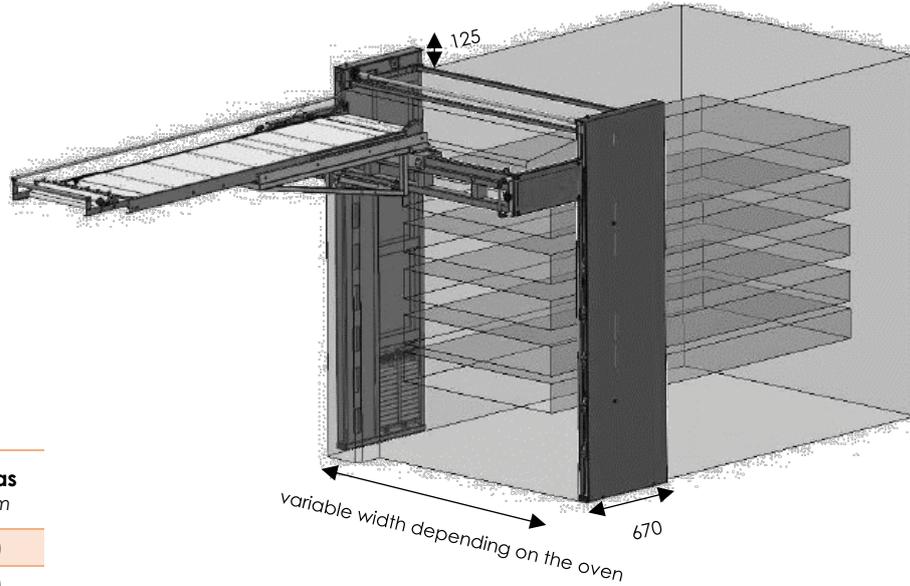

LG Dégagement A en mm	LG Bras en mm
106	230
176	300
346	470
436	530
466	590
511	635

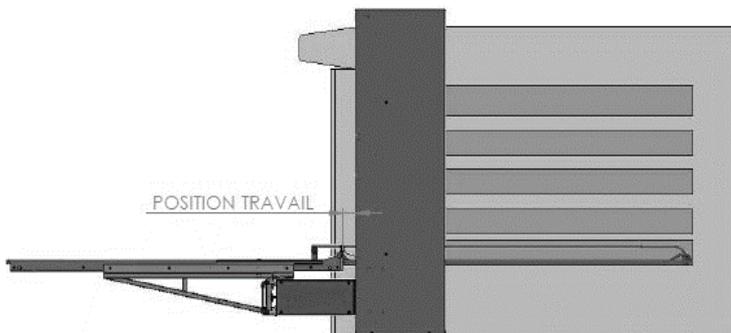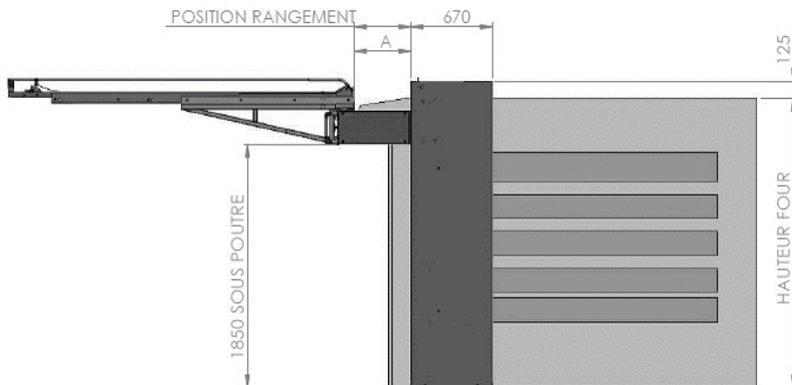

Characteristics

- Ergonomic release handle
- Adjustable index spacing of the deck
- Transmission by industrial distribution chain
- Minimum deck height: 500 mm
- Maximum loading length: 2 450 mm
- Maximum loading width: 890 mm
- Allows to load all bread and to unload most of the bread
- All parts in contact with the exhaust steam are made of aluminum